

## REMARKS

By this Amendment, claims 1-13 are cancelled, and claims 14-28 are added. Thus, claims 14-28 are active in the application. Reexamination and reconsideration of the application are respectfully requested.

The specification and abstract have been carefully reviewed and revised in order to correct grammatical and idiomatic errors in order to aid the Examiner in further consideration of the application. The amendments to the specification and abstract are incorporated in the attached substitute specification and abstract. No new matter has been added.

Also attached hereto is a marked-up version of the substitute specification and abstract illustrating the changes made to the original specification and abstract.

The Applicants thank the Examiner for kindly indicating, in item 7 on page 5 of the Office Action, that claims 3 and 5-9 were indicated to be allowable if rewritten in independent form including all of the limitations of the base claim and any intervening claims.

New independent claim 14 includes the limitations originally recited in cancelled claims 1-3. New dependent claims 15-17 correspond to cancelled dependent claims 5, 9 and 10, respectively.

New independent claim 20 includes the limitations originally recited in cancelled claims 1, 2 and 6. New dependent claims 21 and 22 correspond to cancelled dependent claims 7 and 10, respectively.

New independent claim 23 includes the limitations originally recited in cancelled claims 1, 2 and 8. New dependent claim 24 corresponds to cancelled dependent claim 10.

Accordingly, in view of the Examiner's assertion that claims 3, 6 and 8 would be allowable if rewritten in independent form including all of the limitations of the base claim and any intervening claims, the Applicants respectfully submit that new claims 14, 20 and 23, as well as new claims 15-17, 21, 22 and 24 which depend therefrom, are clearly in condition for allowance.

New independent claims 25, 27 and 28 recite methods corresponding to the mobile communication devices recited in new claims 14, 20 and 23, respectively, and include the patentable features of new claims 14, 20 and 23.

Accordingly, the Applicants respectfully submit that new claims 25, 27 and 28 are also clearly in condition for allowance for including the patentable features of new claims 14, 20 and 23, respectively.

New independent claim 18 includes the limitations originally recited in cancelled claims 1, 2 and 4. New independent claim 26 recites a method corresponding to the mobile communication device of new claim 18.

In item 6 on page 4 of the Office Action, claim 4 was rejected under 35 U.S.C. § 103(a) as being unpatentable over Motegi et al. (U.S. 6,898,423, hereinafter “Motegi”) in view of Puthenkulam et al. (U.S. Patent Application Publication No. 2003/0050977, hereinafter “Puthenkulam”). This rejection is believed to be moot in view of the cancellation of claim 4.

Furthermore, the Applicants respectfully submit that this rejection is inapplicable to new claims 18 and 26 for the following reasons.

New claim 18 recites that the mobile communication device comprises a state detection section for determining whether or not the mobile communication device is in communication. New claim 18 also recites the mobile communication device as comprising a condition determination section for, after the reception section receives the inquiry information, determining whether or not at least one preset condition is satisfied based on a state of the mobile communication device. Further, new claim 18 recites that the mobile communication device comprises a transmission section for generating information for denying the participation in the ad hoc network based on a determination result of the condition determination section, and for transmitting the generated information to the other mobile communication device.

In addition, new claim 18 recites that when the condition determination section determines that the state detection section has detected that the mobile communication device is in communication, the transmission section is operable to generate the information for denying the participation in the ad hoc network.

As described above, new claim 26 recites a method corresponding to the limitations recited in new claim 18.

Therefore, according to the inventions of new claims 18 and 26, the present invention detects whether or not the mobile communication device is in communication

so as to determine whether or not the participation in the ad hoc network is to be accepted or denied. When the participation is to be denied because it is detected that the mobile communication device is in communication, the information for denying the participation in the ad hoc network is generated.

This feature of the present invention is not disclosed or suggested by Motegi and Puthenkulam. As acknowledged by the Examiner, Motegi does not disclose or suggest a mobile communication device which detects whether it is in communication, and when it is detected that the mobile communication device is in communication, the mobile communication device generates the information for denying the participation in the ad hoc network, as recited in new claims 18 and 26.

In an attempt to teach this feature, the Examiner applied Puthenkulam, which discloses a system for responding to networking requests between an initiating communication device and a responding communication device. In particular, Puthenkulam discloses that an automatic networking response mechanism 110 intercepts a networking request transmitted from an initiating communication device, and automatically generates a response 135 to the request. The automatic response is based on the social network of the user of the responding communication device, such as whether the user of the responding communication device is familiar with the user of the initiating communication device or has a history of communicating with the user of the initiating communication device (see paragraphs [0021]-[0025]).

Puthenkulam, however, clearly does not disclose or suggest that the responding communication device detects whether it is in communication, and generates information for denying participation in an ad hoc network if it is detected that the responding communication device is in communication, as recited in new claims 18 and 26.

Instead, Puthenkulam merely discloses that if the identity of the initiating communication device is not known to the responding communication device, automatic response messages are transmitted to the initiating communication device to deny the networking request from the initiating communication device. Further, in paragraphs [0004]-[0005], Puthenkulam merely discloses that a responding communication device may become disrupted or disabled if it must respond to a flood of incoming networking requests. This, however, clearly does not result in or correspond to detecting whether a

mobile communication device is in communication, and if it is detected that the mobile communication device is in communication, generating and transmitting information for denying participation in an ad hoc network, as recited in new claims 18 and 26.

Therefore, the Applicants respectfully submit that Motegi and Puthenkulam fail to disclose or suggest each and every limitation of new claims 18 and 26.

Consequently, no obvious combination of Motegi and Puthenkulam would result in the inventions of new claims 18 and 26 since Motegi and Puthenkulam, either individually or in combination, clearly fail to disclose or suggest each and every limitation of new claims 18 and 26.

Furthermore, in view of the clear distinctions between the present invention, as recited in new claims 18 and 26, and Motegi and Puthenkulam, the Applicants respectfully submit that a person having ordinary skill in the art at the time the invention was made would not have been motivated to modify Motegi and Puthenkulam in such a manner as to result in, or otherwise render obvious, the present invention as recited in new claims 18 and 26.

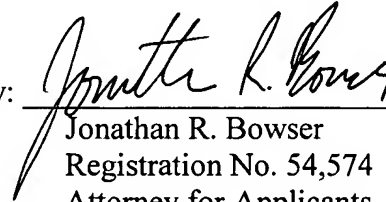
Therefore, the Applicants respectfully submit that new claims 18 and 26, as well as new claim 19 which depends therefrom, are clearly allowable over the prior art as applied by the Examiner.

In view of the foregoing amendments and remarks, it is respectfully submitted that the present application is clearly in condition for allowance. An early notice thereof is respectfully solicited.

If, after reviewing this Amendment, the Examiner feels there are any issues remaining which must be resolved before the application can be passed to issue, the Examiner is respectfully requested to contact the undersigned by telephone in order to resolve such issues.

Respectfully submitted,

Kiyomi SAKAMOTO et al.

By:   
Jonathan R. Bowser  
Registration No. 54,574  
Attorney for Applicants

JRB/nrj  
Washington, D.C. 20006-1021  
Telephone (202) 721-8200  
Facsimile (202) 721-8250  
December 20, 2006



DESCRIPTION

MOBILE COMMUNICATION DEVICE CONTAINABLE IN AD HOC NETWORK

5

TECHNICAL FIELD

The present invention relates to a mobile communication device, and more particularly, to a mobile communication device containable in an ad hoc network.

10

BACKGROUND ART

Mobile communication systems include any ad hoc network system, without requiring any existing infrastructure as typified by a server, an exchange, and a base station, where a mobile communication device finds a communication path by itself, and uses the found communication path to communicate with another mobile communication device.

In conventional ad hoc network systems, a tentative master device is determined from among a plurality of mobile communication devices that are operable to serve as both ~~as~~ a master device and ~~as~~ a slave device, and the other mobile communication devices are determined as slave devices. In such a state, when data exchange between the master device and the slave devices is enabled, a transfer rate measured by using a test signal, and the residual power of a storage battery of each slave device are transmitted from the slave device to the master device. The master device

reselects a true master device based on each transfer rate and each residual power collected in a manner as described above.

#### ~~DISCLOSURE~~-SUMMARY OF THE INVENTION

5           Incidentally, for special reasons, users may be unwilling to incorporate their mobile communication devices into an ad hoc network. However, the conventional ad hoc network systems are disadvantageous in that the mobile communication devices are incorporated into the ad hoc networks without taking account of  
10 the circumstances of the mobile communication devices and their users. Accordingly, unless the above-mentioned users' needs are satisfied, it is difficult to accelerate the spread of the ad hoc network systems.

          Therefore, an object of the present invention ~~aims is~~ to  
15 provide a mobile communication device which is not contained in an ad hoc network under specific circumstances.

          To achieve the above object, a first aspect of the present invention is directed to a mobile communication device capable of data communication through an ad hoc network. The mobile  
20 communication, ~~the device comprising~~ comprises: a reception section for receiving inquiry information for inquiring whether to accept or deny participation in the ad hoc network, where the inquiry information ~~being is~~ sent from another mobile communication device; a condition determination section for, after the reception  
25 section receives the inquiry information, determining whether or

not at least one preset condition is satisfied; and a transmission section for generating information for denying the participation in the ad hoc network based on a determination result of the condition determination section, and for transmitting the generated information to the ~~another~~ other mobile communication device.

Typically, the condition determination section determines whether or not the at least one condition is satisfied based on a state of the mobile communication device.

By way of example, the mobile communication device further includes a storage device for storing information indicating whether or not to accept the participation in the ad hoc network based on a user's input. Here, when the condition determination section determines that the information stored in the storage device indicates no acceptance of the participation in the ad hoc network, the transmission section generates the information for denying the participation in the ad hoc network.

By way of example, the mobile communication device further includes a state detection section for detecting whether or not the device itself is in communication. Here, when the condition determination section determines that the state detection section has detected the mobile communication device as being in communication, the transmission section generates the information for denying the participation in the ad hoc network.

By way of example, the mobile communication device further includes a storage device having stored therein a scheduled time



at which the device itself engages in communication. Here, when the condition determination section determines that the scheduled time stored in the storage device is reached after a lapse of a predetermined period of time, the transmission section generates  
5 the information for denying the participation in the ad hoc network.

By way of example, the mobile communication device further includes a residual power detection section for detecting a residual power of a battery in the device itself. Here, when the condition determination section determines that the residual power  
10 detected by the residual power detection section is less than or equal to a predetermined reference value, the transmission section generates the information for denying the participation in the ad hoc network.

By way of example, the mobile communication device further  
15 includes a storage device having stored therein a database describing a chargeable point for the device itself, and a position detection section for detecting a current position of the device itself. Here, when the condition determination section determines that a distance from the current position detected by  
20 the position detection section to the chargeable point stored in the storage device is less than or equal to a predetermined reference value, the transmission section generates information for accepting the participation in the ad hoc network if the residual power detected by the residual power detection section is less  
25 than or equal to a predetermined reference value.

By way of example, the mobile communication device further includes a storage section having stored therein the age of a user of the device. Here, when the age of the user, which is stored in the storage section, is equal to or more than a predetermined reference value, the transmission section generates information for accepting the participation in the ad hoc network regardless of another condition.

By way of example, the mobile communication device further includes a storage section having stored therein information indicating a driving history of a user of the device itself. Here, when the age of the user, which is stored in the storage section, is equal to or more than a predetermined reference value, the transmission section generates the information for denying the participation in the ad hoc network. ~~when the age of the user, which is stored in the storage section, is equal to or more than a predetermined reference value, the transmission section generates the information for denying the participation in the ad hoc network.~~

Typically, the mobile communication device is mounted in a vehicle.

A second aspect of the present invention is directed to a method for a mobile communication device to perform data communication through an ad hoc network. The ~~the~~ method comprising: a reception step ~~for~~ of receiving inquiry information for inquiring whether to accept or deny participation in the ad

hoc network, where the inquiry information ~~being is~~ sent from another mobile communication device; a condition determination step ~~for of~~, after the inquiry information is received at the reception step, determining whether or not at least one preset  
5 condition is satisfied; and a transmission step ~~for of~~ generating information for denying the participation in the ad hoc network based on a determination result of the condition determination step, and ~~for~~ transmitting the information to the ~~another~~ other mobile communication device.

10 By way of example, the data communication method is implemented by a computer program. Also, the computer program is typically stored in a storage medium.

According to the above first and second aspects, when a predetermined condition is satisfied, the mobile communication  
15 device denies the participation in the ad hoc network. Thus, it is possible to allow the mobile communication device not to be incorporated into the ad hoc network depending on the circumstances of the device itself and the user thereof.

These and other objects, features, aspects and advantages  
20 of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

25 FIG. 1 is a schematic diagram illustrating an exemplary ad

hoc network established by a mobile communication device (node)  
1 according to an embodiment of the present invention;

FIG. 2 is a block diagram illustrating a configuration of  
the node 1 in FIG. 1;

5 FIG. 3 is a schematic diagram illustrating the contents of  
link information stored in a storage device 6 in FIG. 2;

FIG. 4 is a flowchart illustrating the process procedure  
of the node 1 in FIG. 1;

FIG. 5 is a flowchart illustrating the detailed process  
10 procedure of step A2 in FIG. 4;

FIG. 6A is a schematic diagram illustrating a data structure  
of an inquiry packet  $P_i$  transmitted/received in the ad hoc network  
in FIG. 1;

FIG. 6B is a schematic diagram illustrating a data structure  
15 of a data packet  $P_o$  transmitted/received in the ad hoc network  
in FIG. 1;

FIG. 6C is a schematic diagram illustrating a data structure  
of a data packet  $P_r$  transmitted/received in the ad hoc network  
in FIG. 1;

20 FIG. 7 is a flowchart illustrating the detailed process  
procedure of step A5 in FIG. 4;

FIG. 8 is a flowchart illustrating the detailed process  
procedure of step A6 in FIG. 4;

FIG. 9 is a sequence chart illustrating an example of data  
25 communication in the ad hoc network in FIG. 1;

FIG. 10 is a block diagram illustrating a structure of a mobile communication device (node) 10 according to a variation of the mobile communication device 1 shown in FIG. 2;

FIG. 11 is a flowchart illustrating the process procedure  
5 of the node 10 shown in FIG. 10;

FIG. 12 is a flowchart illustrating the detailed process procedure of step E2 shown in FIG. 11;

FIG. 13 is a schematic diagram illustrating a data structure of a data packet Po generated by the node 10 shown in FIG. 10;  
10 and

FIG. 14 is a flowchart illustrating the detailed process procedure of step E3 shown in FIG. 11.

~~BEST MODE FOR CARRYING OUT~~ DETAILED DESCRIPTION OF THE INVENTION

15 ~~{Embodiments}~~

FIG. 1 is a schematic diagram illustrating a configuration of an ad hoc network system according to an embodiment of the present invention. In FIG. 1, the ad hoc network system is separated from and independent of an existing infrastructure as typified by a  
20 server, an exchange, and a base station, and the ad hoc network system is autonomously constructed by a plurality of mobile communication devices 1. Typically, a mobile communication device 1 is included in a vehicle-mountable apparatus (e.g., a navigation apparatus), a PDA (Personal Digital Assistant), or a  
25 mobile apparatus such as a mobile telephone. Note that in the

present embodiment, the mobile communication device 1 is referred to below as a "node 1" for convenience.

As shown in FIG. 2, the node 1 includes a program storage section 11, a transmission/reception control section 12, a work area 13, and a transmission/reception section 14. The program storage section 11 is typically composed of a ROM (Read Only Memory) having stored therein a computer program (hereinafter, "communication program") 111 describing a communication protocol that is unique to the present embodiment. The transmission/reception control section 12 controls data transmission/reception by using the work area 13 in accordance with the communication program 111. The transmission/reception section 14 receives/transmits data from/to another node 1 under the control of the transmission/reception control section 12.

Also, the node 1 is connected to and capable of communicating with peripheral devices including a residual power detection section 2, a state detection section 3, an input device 4, a position detection section 5, and a storage device 6.

The residual power detection section 2 detects the residual power of a battery provided in a mobile apparatus including the node 1. Note that the residual power detection section 2 is suitable for mobile devices, such as mobile telephones and PDAs, which require recharging from a commercial power supply and whose operating time on a single charge is relatively short. On the other hand, the residual power detection section 2 is not

necessarily required for vehicle-mounted apparatuses which receive a voltage supply from a vehicle-mounted lead storage battery. However, it is preferable to provide the residual power detection section 2 to an apparatus mounted in a vehicle, such as an electric vehicle or a hybrid car, which requires recharging with high frequency.

The state detection section 3 detects whether or not the mobile apparatus including the node 1 is currently performing audio communication or data communication.

10 The input device 4 is operated by a user. The user can operate the input device 4 to initially set whether to allow or deny the participation of the node 1 in an ad hoc network. Also, the user can operate the input device 4 to schedule a time period (hereinafter, referred to as a "scheduled time period") in which  
15 the mobile apparatus performs audio communication or data communication.

The position detection section 5 detects the current position of the mobile apparatus. Specifically, when the mobile apparatus is a vehicle-mounted device, the position detection  
20 section 5 may be a combination of a GPS (Global Positioning System) receiver and an autonomous navigation sensor, or may be a DRSC  
(~~Dedicate~~—Dedicated Short Range Communication) receiver. Alternatively, when the mobile apparatus is a PHS (Personal Handy-phone System), the position detection section 5 detects the  
25 current position of the mobile apparatus based on information

obtained from a nearby base station. Alternatively still, when the mobile apparatus is a mobile telephone or a PDA, the position detection section 5 detects the current position of the mobile apparatus through a module incorporating a GPS receiver.

5           The storage device 6 is typically a nonvolatile storage device, and has stored therein a rechargeable point database (hereinafter, referred to as a "rechargeable point DB"), reservation information, and link information which is required for establishing an ad hoc network.

10           The rechargeable point DB is a collection of pieces of position information concerning points (hereinafter, referred to as "service points") for providing a recharge service for mobile apparatuses, such as mobile telephones and PDAs, which require recharging with high frequency.

15           Also, the reservation information contains at least a scheduled time period inputted by the user operating the input device 4.

            Also, as shown in FIG. 3, the link information contains own node identification information (hereinafter, referred to as an  
20 "own node ID"), a denial flag, a hop limit, a retry time, the number of trials, and at least one endpoint node identification number (hereinafter, referred to as an "endpoint node ID").

            The own node ID is identification information for uniquely specifying the node 1. The hop limit denotes the maximum number  
25 of relay nodes within an ad hoc network.



The denial flag is binary information indicating whether to deny or accept the participation of the node 1 in the ad hoc network. In the present embodiment, ~~by~~ by way of example, a denial flag of 1 indicates a denial of participating in the ad hoc network, and a denial flag of 0 indicates that the participation in the ad hoc network is acceptable.

The retry time denotes a time period from when the ad hoc network is found to fail in a last data communication until when the data communication is retried.

10 The number of trials is the number of times of repeatedly transmitting the same data to the same endpoint node 1.

Next, the operation of the node 1 is described. FIG. 4 is a flowchart illustrating the process procedure of the node 1. In FIG. 4, the transmission/reception control section 12 of the node 1 executes the communication program 11 stored in the program storage section 11, and determines whether or not an upper layer (e.g., an application layer) has generated data that is to be transmitted after an ad hoc network is established (step A1).

If the data to be transmitted has been generated, the node 1 acts as a start point node 1, and the transmission/reception control section 12 executes a process shown in FIG. 5 (step A2). In FIG. 5, the transmission/reception control section 12 sets a counter for the number of trials to zero (step B1), and thereafter, controls the search for any node (relay node or endpoint node) 1 that is present within the range where radio waves are emitted from its

own node 1 (step B2). Note that in the following descriptions,  
any node 1 to be searched for at step B2 is referred to as a "nearby  
node 1". At step B2, it is preferable that the startpoint node 1  
emits radio waves which are required for searching for nearby  
5 nodes 1 with its directivity increased, preferably, such that only  
one nearby node 1 can be found. Note that the startpoint node 1  
may emit the required radio waves in all directions to search for  
the nearby node 1.

As a result of step B2, if at least one nearby node 1 is  
10 found (step B3), the transmission/reception control section 12  
inquires ~~of~~ the target nearby node 1 whether it accepts or denies  
the participation in the ad hoc network (step B4). More  
specifically, the transmission/reception control section 12  
acquires the own node ID and the endpoint node ID from the storage  
15 device 6. Thereafter, in order to perform the inquiry as described  
above, the transmission/reception control section 12 generates  
an inquiry packet  $P_i$ , which contains the acquired two IDs as shown  
in FIG. 6A, on the work area 13, and sends the generated inquiry  
packet  $P_i$  from the transmission/reception section 14 to the target  
20 nearby node 1.

After step B4, the transmission/reception control  
section 12 waits for a first response to be received (step B5).  
Here, as will become apparent later, the first response is  
information indicating whether to accept or deny the participation  
25 in the ad hoc network, which and is sent from the target nearby

node 1. The above-described first response ~~as above~~ is received by the transmission/reception section 14, and is thereafter transferred to the work area 13.

After first responses are transferred, if the transmission/reception control section 12 determines that there are any first responses indicating an acceptance of participation in the ad hoc network (step B6), data packets Po as shown in FIG. 6B are generated on the work area 13 based on the data to be transmitted, and each of the data packets Po on the work area 13 is sent through the transmission/reception section 14 to any nearby nodes 1 having sent the first responses indicating the acceptance of participation in the ad hoc network (step B7). Specifically, the data to be transmitted is divided by a predetermined size into several datagrams. Thereafter, the transmission/reception control section 12 extracts the own node ID, the hop limit, and the endpoint node ID from the storage device 6, and adds them to each datagram to generate several data packets Po as shown in FIG. 6B.

After step B7, the transmission/reception control section 12 waits for a second response to be received (step B8). Here, as will become apparent later, the second response is information indicating whether or not the data communication over the ad hoc network has been completed, ~~which~~ is originally generated by an endpoint node 1, which will be described later, and is transmitted to the startpoint node 1. However, in the ad hoc network, when data communication is conducted between the endpoint

node 1 and the startpoint node 1, at least one relay node 1 may intervene therebetween, and therefore, the second response may be transmitted directly from the endpoint node 1 to the startpoint node 1, or may be transmitted through the relay node 1 to the  
5 | startpoint node 1. The above-described second response ~~as above~~ is received by the transmission/reception section 14 in the startpoint node 1, and is thereafter, transferred to the work area 13.

After the second response is transferred, if the  
10 | transmission/reception control section 12 determines that the received response indicates the completion of the data communication (step B9), the process of FIG. 5 (step A2 in FIG. 4) is terminated. Thereafter, the transmission/reception control section 12 returns to step A1. On the other hand, if the second  
15 | response does not indicate the completion of the data communication, the transmission/reception control section 12 determines whether or not the value of the counter is equal to or more than the number of trials (step B10). If the value of the counter is equal to or more than the number of trials, the transmission/reception  
20 | control section 12 terminates the process of FIG. 5 (step A2 in FIG. 4). Thereafter, the transmission/reception control section 12 returns to step A1.

On the other hand, if the value of the counter is less than the number of trials, the transmission/reception control  
25 | section 12 activates a timer (not shown) (step B11), and thereafter,

waits for the timer to count the retry time (see FIG. 3) (step B12). After a lapse of the retry time, the transmission/reception control section 12 increments the counter for the number of trials by 1 (step B13), and thereafter, returns to step B2. As described  
5 above, if the data communication has not been completed, the startpoint node 1 tries to conduct data communication the number of times defined by the number of trials at intervals of at least the retry time.

Also, in the case where no nearby node 1 is found at step B3,  
10 if it is determined at step B7 that all first responses indicate the denial of participation, the transmission/reception control section 12 also performs the above step B10.

Here, FIG. 4 is referred to again. At step A1, if no data to be transmitted has been generated, the transmission/reception  
15 control section 12 determines whether or not any inquiry packet  $P_i$  to be sent at step B4 or at step C11 has been received (step A3). As described above, the inquiry packet  $P_i$  is information for requesting the first response, and is sent from the startpoint node 1 or the relay node 1. The above inquiry packet  $P_i$  is received  
20 by the transmission/reception section 14, and is thereafter transferred to the work area 13. At step A3, if no inquiry packet  $P_i$  has been received, the transmission/reception control section 12 returns to step A1.

On the other hand, if any inquiry packet  $P_i$  has been received  
25 at step A3,, the transmission/reception control section 12

determines whether or not the endpoint node ID contained in the received packet  $P_i$  matches the own node ID stored in the storage device 6 (step A4). If the two IDs do not match, the node 1 acts as a relay node 1, and the transmission/reception control section 12 performs a process as shown in FIG. 7 (step A5). In FIG. 7, the transmission/reception control section 12 determines whether or not the denial flag set in the storage device 6 is 1 (step C1). If the denial flag is 1, the transmission/reception control section 12 performs step C5, which will be described later.

10 On the other hand, if the denial flag is not 1, the transmission/reception control section 12 determines, based on a detection result of the state detection section 3, whether or not the mobile apparatus including the node 1 is currently performing audio communication or data communication. Further, 15 the transmission/reception control section 12 refers to the reservation information in the storage device 6, and determines whether or not the audio communication or data communication starts within a predetermined time period (step C2). If the communication is determined as being performed or scheduled, the 20 transmission/reception control section 12 deems that the participation in the ad hoc network ~~as is~~ not possible, and performs step C5, which will be described later.

On the other hand, if the mobile apparatus is determined as not being in communication or as not being scheduled to 25 communicate, the transmission/reception control section 12

determines, based on a detection result of the residual power  
detection section 2, whether or not the residual power of the  
battery in the mobile apparatus including the node 1 is less than  
or equal to a predetermined reference residual power (step C3).

5 If the residual power is determined as low, the  
transmission/reception control section 12 deems that the  
participation in the ad hoc network is not possible, and performs  
step C6, which will be described later.

On the other hand, if the residual power is not low, the  
10 transmission/reception control section 12 obtains the current  
position from the position detection section 5, and thereafter,  
obtains position information concerning a service point closest  
to the current position from the rechargeable point DB stored in  
the storage device 6. Thereafter, the transmission/reception  
15 control section 12 derives the distance from the current position  
to the closest service point, and determines whether or not the  
derived distance is less than or equal to a predetermined reference  
distance (step C4).

If YES is determined at any of the above steps C1, C2, and  
20 C4, the transmission/reception control section 12 generates a  
first response indicating a denial of participating in the ad hoc  
network, and sends the generated first response to a node  
(startpoint node or another relay node) 1 having transmitted the  
current inquiry packet  $P_i$  (step C5). Thereafter, the  
25 transmission/reception control section 12 exits the process of

FIG. 7, and terminates the process as a relay node 1 (step A5 in FIG. 4).

If NO is determined at any of the above steps C3 and C4, the transmission/reception control section 12 generates, on the work area 13, a first response indicating an acceptance of participating in the ad hoc network, and sends the generated first response from the transmission/reception section 14 to the node (startpoint node or another relay node) 1 having transmitted the current inquiry packet  $P_i$  (step C6).

After step C6, the transmission/reception control section 12 waits for data packets  $P_o$  or  $P_r$  (to be described later) to be transmitted from the node (startpoint node or another relay node) 1 having transmitted the current inquiry packet  $P_i$  (step C7).

The data packets  $P_o$  or  $P_r$  are received by the transmission/reception section 14, and are thereafter transferred to the work area 13. After the data packets  $P_o$  are transferred, the transmission/reception control section 12 determines whether or not hop limits in the received packets  $P_o$  are 0 (step C8). If the hop limits are not 0, the transmission/reception control section 12 deems that the received data packets  $P_o$  can be relayed, and searches for a nearby node 1 as in the above step B2, (step C9). If any nearby node 1 is found (step C10), the transmission/reception control section 12 performs an inquiry on the target nearby node 1 as in the above



step B4 (step C11).

Thereafter, as in the above steps B5 and B6, the transmission/reception control section 12 receives first responses from target nearby nodes 1 (step C12), and determines  
5 | whether or not there is any nearby node 1 which accepts the participation in the ad hoc network (step C13). If the transmission/reception control section 12 determines that there is any nearby node 1 which accepts the participation in the ad hoc network, the hop limits of the data packets Po currently stored  
10 | in the work area 13 (see FIG. 6B) are incremented by 1, and data packets Pr as shown in FIG. 6C are generated on the work area 13. Such data packets Pr are sent from the work area 13 through the transmission/reception section 14 to any nearby node 1 having  
| accepted the participation in the ad hoc network (step C14).

15 | After step C14, upon receipt of a second response sent from any nearby node 1, the transmission/reception control section 12 transmits a reception response to the node (startpoint node or another relay node) 1 having given the current inquiry to the node 1 thereof (step C16). Thereafter, the transmission/reception  
20 | control section 12 exits the process of FIG. 7, and terminates the process as a relay node 1 (step A5 in FIG. 4).

Also, if the hop limit is 0 at step C8, or if there is no  
| nearby node 1 which accepts the participation in the ad hoc network at step C13, the transmission/reception control section 12  
25 | generates, on the work area 13, a second response indicating that

the data communication has not been completed, and sends the generated second response through the transmission/reception section 14 to the node (startpoint node or another relay node) 1 having given the current inquiry to the node 1 thereof (step C17).

5   Thereafter, the transmission/reception processing section 12 exits the process of FIG. 7, and terminates the process as a relay node 1 (step A5 in FIG. 4).

Here, FIG. 4 is referred to again. At step A4, since the endpoint node ID contained in the received inquiry packet Pi matches the own node ID, the node 1 acts as an endpoint node 1, and executes a process as shown in FIG. 8 (step A6). In FIG. 8, as in step C7, the transmission/reception control section 12 waits for any data packet Po or Pr to be transmitted (step D1). After data packets Po or Pr are transferred to the work area 13, the transmission/reception control section 12 sequentially passes the received packets Po or Pr to an upper layer (e.g., an application layer), and, after the last data packet Po or Pr has been received (step D2), it the transmission/reception control section 12 generates, on the work area 13, a second response indicating that the data communication has been completed, and the generated second response is sent through the transmission/reception section 14 to the node (startpoint node or relay node) 1 having given the current inquiry to the node 1 thereof (step D3). Thereafter, the transmission/reception control section 12 exits the process of FIG. 8, and terminates the process as an endpoint node 1 (step A6

in FIG. 4).

Next, an example of data communication in an ad hoc network system as exemplified above is described. In the present embodiment, by way of example, as shown in FIG. 1, an ad hoc network is constructed by four nodes 1a-1d, and the node 1a transmits data through the nodes 1b and 1c to the node 1d. That is, the node 1a is a startpoint node 1a, the nodes 1b and 1c are first and second relay nodes 1b and 1c, respectively, and the node 1d is an endpoint node 1d. Also, for the sake of clarifying features of the present embodiment, FIG. 1 further illustrates a node 1e which denies the participation in the ad hoc network system. In the following descriptions, the node 1e is referred to as a "denial node 1e".

In the node 1a of FIG. 9, when transmission data to the node 1d is generated, the node 1a performs the process as a startpoint node 1 (see FIG. 5). Here, if the nearby node 1b is found by performing steps B2 and B3, the node 1a as the startpoint node 1a generates an inquiry packet  $P_i$ , and transmits ~~it~~ the generated inquiry packet  $P_i$  to the nearby node 1b at step B4 (sequence E1 in FIG. 9).

The nearby node 1b performs the process as a relay node 1 since the endpoint node ID of the inquiry packet  $P_i$  does not match the own node ID (see FIG. 7). Here, if NO is determined at step C3 or C4, at step C6, a first response (indicated as Ack in FIG. 9) indicating the acceptance of participation in the ad hoc network is generated, and consequently, the nearby node 1b, as the first

relay node 1b, returns the generated first response to the startpoint node 1a (sequence E2).

Since the first response indicating the acceptance of participation in the ad hoc network is returned, at step B7, the startpoint node 1a generates a data packet Po, and transmits ~~it~~ the generated data packet Po to the first relay node 1b (sequence E3).

Upon receipt of the data packet Po from the startpoint node 1a, the first relay node 1b performs steps C9 and C10. As a result, if the nearby nodes 1c and 1e are found, at step C11, the first relay node 1b generates an inquiry packet Pi, and transmits ~~it~~ the generated inquiry packet P; to the nearby nodes 1c and 1e (sequence E4).

Here, the nearby node 1c performs the process as a relay node since the endpoint node ID in the inquiry packet Pi does not match the own node ID (see FIG. 7). Here, similar to the nearby node 1b, the nearby node 1c generates a first response indicating the acceptance of participation in the ad hoc network, and, as ~~the second relay node 1c,~~ the nearby node 1c returns the generated first response to the first relay node 1b (sequence E5).

Also, the nearby node 1e performs the process as a relay node in response to the inquiry packet Pi, but if YES is determined at any of steps C1, C2, and C4, as the denial node 1e, ~~it~~ the node 1e generates a first response (indicated as Nack in FIG. 9) for denying the participation in the ad hoc network, and returns ~~it~~

the generated first response to the first relay node 1b  
(sequence E6).

Since the first response indicating the acceptance of participation is returned, at step B7, the first relay node 1b  
5 generates a data packet  $P_r$  based on the data packet  $P_o$ , and  
transmits ~~it~~ the generated data packet  $P_r$  to the second relay node 1c  
(sequence E7). However, the first relay node 1b does not transmit  
the data packet  $P_r$  to the denial node 1e having transmitted the  
first response indicating the denial of participation in the ad  
10 hoc network.

Upon receipt of the data packet  $P_r$  from the first relay  
node 1b, the second relay node 1c performs steps C9 and C10. As  
a result, if the nearby node 1d is found, at step C11, the second  
relay node 1c generates an inquiry packet  $P_i$ , and transmits ~~it~~  
15 the generated inquiry packet  $P_i$  to the nearby node 1d  
(sequence E8).

Here, the nearby node 1d performs the process as an endpoint  
node since the endpoint node ID in the inquiry packet  $P_i$  matches  
the own node ID (see FIG. 8). In this case, at step D1, the nearby  
20 node 1d generates a first response indicating the acceptance of  
participation in the ad hoc network, and, as the endpoint node 1d,  
~~it~~ transmits the generated first response to the second relay  
node 1c (sequence E9). Thereafter, the endpoint node 1d receives  
a data packet  ~~$P_r$~~   $P_o$  transmitted from the second relay node 1c,  
25 and upon completion of the reception, at step D4, ~~it~~ the endpoint

node 1d generates a second response indicating the completion of data communication, and transmits ~~it~~ the generated second response to the second relay node 1c (sequence E10). The second response is received by the startpoint node 1a via the second relay node 1c  
5 and the first relay node 1b.

As described above, if predetermined conditions (steps C1, C2, and C4 in FIG. 7) are satisfied, the mobile communication device 1 according to the present embodiment denies the participation in the ad hoc network. Thus, it is possible to allow  
10 the mobile communication device 1 not to be incorporated into the ad hoc network depending on the circumstances of the device itself and the user thereof. As a result, it is possible to accelerate the spread of the ad hoc network system.

Now, consider a case where the present mobile communication  
15 device 1 is mounted in a vehicle, and further, the vehicle's position information and the vehicle's number are added as datagrams to each data packet Po or Pr (see FIG. 6B or FIG. 6C). In this case, by setting, as the endpoint node ID, the ID of a center station of a vehicle emergency call system, such as "HELPNET"  
20 in Japan, for example, it becomes possible to use the ad hoc network to realize a service similar to that of the vehicle emergency call system.

Note that in the description of the present embodiment, as the conditions for generating a first response (denial of participation), those illustrated at steps C1-C3 shown in FIG. 7  
25

have been described by way of example. However, this is not restrictive, and in the case where a plurality of mobile communication devices 1 constitute a group, the mobile communication devices 1 may generate and transmit a first response  
5 (denial of participation) if they receive an inquiry from a mobile communication device 1 which does not belong in their group.

{Variations}

FIG. 10 is a block diagram illustrating a structure of a mobile communication device (hereinafter, referred to  
10 interchangeably as a "node") 10 according to a variation of the above-described embodiment. In terms of block configurations, the mobile communication device 10 in FIG. 10 is different from the mobile communication device 1 in that a user information communication section 7 is further included. Except for this,  
15 there is no difference in the block configurations between the two mobile communication devices ~~10-1~~ and ~~110~~. Therefore, in FIG. 10, elements corresponding to those shown in FIG. 2 are denoted by the same reference numerals, and the description thereof is omitted.

20 The user information communication section 7 performs interactive communication with a user information communication section 83 in a smart card 8 under the control of the transmission/reception control section 12. Specifically, when the user information communication section 7 is brought into a  
25 state where communication with the smart card 8 is possible, ~~its~~

the user information communication section 7 sends a transmission request to the user information communication section 83. Here, the transmission request is data which is stored in the smart card 8 for requesting transmission of information required by the node 10.

5       The smart card 8 is preferably an electronic driver's license, and includes a storage medium 81, a control section 82, and the user information communication section 83. Note that in the present embodiment, the smart card is equivalent to an IC (Integrated Circuit) card.

10       The storage medium 81 has stored therein various information concerning the holder of the smart card 8, i.e., a person who is permitted by authorities to drive a vehicle. As shown in FIG. 10, the information required by the node 10 according to the present variation concerns the age of the holder of the smart card 8 and  
15       demerit points lost through previous traffic violations, and any other information is omitted in ~~the figure~~ FIG. 10.

Also, in the smart card 8, the control section 82 receives the transmission request transmitted from the node 10 via the user information communication section 83. In response to the  
20       received transmission request, the control section 82 reads the age and the demerit points from the storage medium 81. Thereafter, the control section 82 passes the read information to the user information communication section 83. The user information communication section 83 sends the information received from the  
25       control section 82 to the user information communication section 7



of the node 10.

Also, in the node 10, the user information communication section 7 transfers and stores the received age and demerit points onto the work area 13.

5       Next, referring to a flowchart in FIG. 11, the operation of the node 10 is described. FIG. 11 is different from FIG. 4 in that step E1 is further included, and steps ~~E1-E2~~ and ~~E2-E3~~ are included instead of steps A2 and A5. Since there is no difference between FIG. 11 and FIG. 4 except for the above, ~~in~~  
10 | ~~FIG. 11~~, steps in FIG. 11 corresponding to those in FIG. 4 are denoted by the same numerals, and the description thereof is omitted.

First, in FIG. 11, the communication program 111 is executed, and further, when the node 10 and the smart card 8 are brought  
15 | into a state where communication therebetween is possible, as described above, the user information communication section 7 in the node 10 obtains the age and the demerit points from the smart card 8, and transfers and stores them onto the work area 13 (step E1).

20       Also, if YES is determined at step A1, the node 10 acts as a start point node 10 as in the above-described embodiment (step E2). In this case, the transmission/reception control section 12 performs a process in accordance with the process procedures shown in FIG. 12. FIG. 12 is different from FIG. 5 in that step F1 is  
25 | included instead of step B7. Except for this, there is no

difference between the flowcharts shown in FIG. 12 and FIG. 5.

Therefore, ~~in FIG. 12,~~ steps in FIG. 12 corresponding to those shown in FIG. 5 are denoted by the same numerals, and the description thereof is omitted.

5           If YES is determined at step B6, the transmission/reception control section 12 generates, on the work area 13, data packets Po having a data structure shown in FIG. 13, and sends each of the data packets Po on the work area 13 through the transmission/reception section 14 to any nearby node 1 having  
10   transmitted a first response indicating the acceptance of participation (step F1). Specifically, data to be transmitted is divided by a predetermined size into several datagrams. Thereafter, the transmission/reception control section 12 retrieves the own node ID, the hop limit, and the endpoint node  
15   ID from the storage device 6, ~~and further,~~ as well as the age of the user of the startpoint node 10 from the work area 13, and adds them to each datagram to generate several data packets Po as shown in FIG. 13A. When step F1 as described above is completed, the process of the startpoint node 10 proceeds to step B8.

20           Also, if NO is determined at step A4, the node 10 acts as a relay node 10 as in the above-described embodiment (step E3). In this case, the transmission/reception control section 12 performs a process in accordance with the process procedure shown in FIG. 14. FIG. 14 is different from FIG. 7 in that steps G1  
25   and G2 are further included. Except for this, there is no

difference between the flowcharts shown in FIG. 14 and FIG. 7.

Therefore, ~~in FIG. 14,~~ steps in FIG. 14 corresponding to those shown in FIG. 7 are denoted by the same numerals, and the description thereof is omitted. Note that for the sake of simplification, in FIG. 14, illustrations from step C8 onward are omitted.

In FIG. 7, before performing step C1, the transmission/reception control section 12 retrieves the age of the user of the startpoint node 10 from each of the currently received data packets Po, and compares ~~it~~ the retrieved age with a prestored first reference value. Here, the first reference value is an index for determining whether or not the user of the startpoint node 10 is aged, and ~~it~~ the first reference value is selected to be roughly 65, for example.

As a result of the above comparison, if the age of the user is equal to or more than the first reference value (step G1), the transmission/reception control section 12 deems that there is a possibility of an emergency call since the data packets Po are from the mobile communication device 10 used by an aged person, and unconditionally performs step C6.

On the other hand, if the age of the user is less than the first reference value, the transmission/reception control section 12 performs step C1.

Also, after step C2, the transmission/reception control section 12 retrieves the user's demerit points stored in the work

area 13 within the node 10 thereof. It should be noted that the user as described herein refers to the user of the relay node 10, rather than to the user of the startpoint node 10.

5 |       Thereafter, the transmission/reception control section 12  
| determines whether or not the retrieved demerit points are equal  
| to or more than a second reference value (step G2). Here, the  
| second reference value is an index indicating whether or not the  
| user frequently commits traffic violations.

10 |       If the demerit points are equal to or more than the second  
| reference value, the transmission/reception control section 12  
| deems that the participation in the ad hoc network is not appropriate  
| since the user of the relay node 10 frequently commits traffic  
| violations, and performs step C5. The reason for performing the  
| process as described above is that there is a possibility that  
15 | the ad hoc network might be disconnected if the relay node 10 is  
| involved in a traffic violation or accident.

      On the other hand, if the demerit points are less than the second reference value, the transmission/reception control section 12 performs step C3.

20 |       As described above, according to the present variation, if  
| the user of the startpoint node 10 is an aged person, the relay  
| node 10 transmits a first response (acceptance of participation)  
| without taking into account any of the conditions of steps C1-C3  
| and G2, i.e., without denying the participation in the ad hoc network.  
25 | Thus, it is possible to provide a mobile communication device 10

which is more suitable for an emergency call. Also, any relay  
node 10 used by a user with high demerit points is determined as  
to be inappropriate for the participation in the ad hoc network,  
and therefore, it is possible to provide a mobile communication  
5 device 10 which is capable of constructing a more reliable ad hoc  
network.

Also, consider a case where the present mobile communication  
device 10 is mounted in a vehicle, and, further, the vehicle's  
position information and the vehicle's number are added as  
10 datagrams to each data packet Po (see FIG. 13). In this case,  
by setting, as the endpoint node ID, the ID of a center station  
of a vehicle emergency call system, such as "HELPNET" in Japan,  
for example, it becomes possible to use the ad hoc network to realize  
a service similar to that of the vehicle emergency call system.

15 Note that in the description of the present embodiment, as  
the conditions for generating a first response (denial of  
participation), those illustrated at steps C1-C3 shown in FIG. 14  
have been described by way of example. However, this is not  
restrictive, and in the case where a plurality of mobile  
20 communication devices 10 constitute a group, the mobile  
communication devices 10 may generate and transmit a first response  
(denial of participation) if they receive an inquiry from a mobile  
communication device 10 which does not belong in their group.

While the invention has been described in detail, the  
25 foregoing description is in all aspects illustrative and not

restrictive. It is understood that numerous other modifications and variations can be devised without departing from the scope of the invention.

5

#### INDUSTRIAL APPLICABILITY

A mobile communication device according to the present invention is suitable for use in, for example, a navigation apparatus, a portable telephone, or a personal computer, which is required to achieve technical effects of being able to  
10 autonomously construct a network and deny the participation in a network.

# ABSTRACT

In a mobile communication device-1, when an inquiry packet sent from another mobile communication device-1 for inquiring whether to accept or deny the participation in an ad hoc network is transferred to a work area-13, a transmission/reception control section 12 determines whether or not a denial flag set in a storage device-6 is 1. When the denial flag is 1, the transmission/reception control section-12 generates a first response for denying the participation in the ad hoc network, and transmits ~~it~~ the first response through a transmission/reception section-14 to the ~~another~~ other mobile communication device 1 ~~having that~~ transmitted the inquiry packet.